


## Inch Thin Wall Bearings

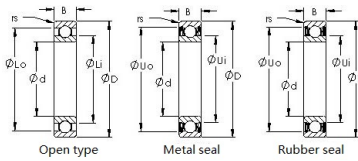

| select    | Inquiry   | Bearing Number | Dimensions |     |     | Basic Load Rating |        |
|-----------|-----------|----------------|------------|-----|-----|-------------------|--------|
|           |           |                | d          | D   | B   | Cr(N)             | Cor(N) |
| R1038     | 9.525 mm  | 15.875 mm      | 3.967 mm   | 96  | 53  |                   |        |
| R1038 2RS | 9.525 mm  | 15.875 mm      | 3.967mm    | 96  | 53  |                   |        |
| R1038zz   | 9.525 mm  | 15.875 mm      | 3.967mm    | 96  | 53  |                   |        |
| R1212     | 12.7 mm   | 19.05 mm       | 3.967 mm   | 111 | 71  |                   |        |
| R1212 2RS | 12.7 mm   | 19.05 mm       | 3.967 mm   | 111 | 71  |                   |        |
| R1212zz   | 12.7 mm   | 19.05 mm       | 3.967 mm   | 111 | 71  |                   |        |
| R1458     | 15.875 mm | 22.225 mm      | 3.967 mm   | 116 | 81  |                   |        |
| R1458 2RS | 15.875 mm | 22.225 mm      | 3.967mm    | 116 | 81  |                   |        |
| R1458zz   | 15.875 mm | 22.225 mm      | 3.967 mm   | 116 | 81  |                   |        |
| R1634     | 19.05 mm  | 25.4 mm        | 3.967 mm   | 127 | 99  |                   |        |
| R1634 2RS | 19.05 mm  | 25.4 mm        | 3.967 mm   | 127 | 99  |                   |        |
| R1634zz   | 19.05 mm  | 25.4 mm        | 3.967 mm   | 127 | 99  |                   |        |
| R1878     | 22.225 mm | 28.575 mm      | 3.697 mm   | 137 | 109 |                   |        |
| R1878 2RS | 22.225 mm | 28.575 mm      | 3.967 mm   | 137 | 109 |                   |        |
| R1878zz   | 22.225 mm | 28.575 mm      | 3.967 mm   | 137 | 109 |                   |        |
| R2127     | 26.988 mm | 33.338 mm      | 3.967 mm   | 145 | 128 |                   |        |
| R2127 2RS | 26.988 mm | 33.338 mm      | 3.967 mm   | 145 | 128 |                   |        |
| R2127zz   | 26.988 mm | 33.338 mm      | 3.967 mm   | 145 | 128 |                   |        |
| R2420     | 31.75 mm  | 38.1 mm        | 3.967 mm   | 154 | 146 |                   |        |
| R2420 2RS | 31.75 mm  | 38.1 mm        | 3.967mm    | 154 | 146 |                   |        |
| R2420zz   | 31.75 mm  | 38.1 mm        | 3.967 mm   | 154 | 146 |                   |        |

## Inch Thin Wall Bearings

|           |           |           |          |     |     |
|-----------|-----------|-----------|----------|-----|-----|
| R2622     | 34.925 mm | 41.625 mm | 3.967 mm | 163 | 165 |
| R2622 2RS | 34.925 mm | 41.625 mm | 3.967 mm | 163 | 165 |
| R2622zz   | 34.925 mm | 41.625 mm | 3.967 mm | 163 | 165 |
| R2824     | 38.1 mm   | 44.45 mm  | 3.967 mm | 166 | 174 |
| R2824 2RS | 38.1 mm   | 44.45 mm  | 3.967 mm | 166 | 174 |
| R2824zz   | 38.1 mm   | 44.45 mm  | 3.967 mm | 166 | 174 |
| R3026     | 41.625 mm | 47.625 mm | 3.967 mm | 175 | 192 |
| R3026 2RS | 41.625 mm | 47.625 mm | 3.967 mm | 175 | 192 |
| R3026zz   | 41.625 mm | 47.625 mm | 3.967mm  | 175 | 192 |